

## PC-U5E-H0424-IG-0.5M

### Description

Osilan's Cat5e Patch Cords are part of the cat5e cable solutions that are flexible and cost-effective solutions that fully comply with category 5/Class E standards. Cat5 Patch cords are available in U/UTP, F/UTP shielded cable and with PVC or LSZH sheath, which are ideal for most of today's LAN network requirements and specifications with designs that support 100 MHz applications.

### Features


- Category 5e U/UTP patch cord.
- LSZH Sheath.
- Wired to T568B wiring schemes.
- 4 Pairs, 24 AWG solid copper conductors.
- Supports IEEE 802.3bt type 3,4 & PoE++ Standards.
- Each patch cord is 100% performance tested to component limits.

### Application

- Suitable for all category 5e backbone and horizontal Cabling applications.
- 10 Base-T (Ethernet), 100 Base-T (Fast Ethernet), 1000 Base-T (Gigabit Ethernet).
- 155Mb/s ATM, 622Mb/s ATM, 1.2Gb/s ATM, Token Ring 4/16 & ISDN.

### Standards

- ANSI/TIA-568-C.2 Category 5e
- IEC 60603-7
- UL444
- ISO 11801 2<sup>nd</sup> Edition
- EN 50173-1
- UL1581
- IEC 619352
- EN 60332-1
- UL1666

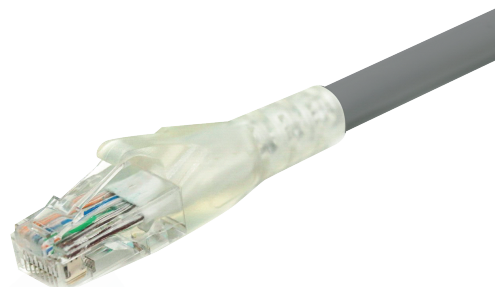


#### Technical Specifications

|                            |                                                                                                                          |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Central Element            | Cross Section - Solid Polyethylene PE                                                                                    |
| Conductor                  | 24AWG Stranded Bare Copper                                                                                               |
| Insulation                 | HDPE                                                                                                                     |
| Pairs                      | 4 Twisted Pairs                                                                                                          |
| Sheath                     | LSZH (LSZH IEC 60332-1 Sheath)                                                                                           |
| Outer Diameter             | 5.5mm (+/- 0.4mm)                                                                                                        |
| Identification             | Pair 1: White Blue / Blue<br>Pair 2: White Orange / Orange<br>Pair 3: White Green / Green<br>Pair 4: White Brown / Brown |
| Connector                  | RJ45 8P8C including boot                                                                                                 |
| Wiring Standards           | T568B wiring                                                                                                             |
| Temperature (Installation) | -30°C to +50°C                                                                                                           |
| Temperature (Operation)    | -20°C to +75°                                                                                                            |

#### Mechanical and Electrical Specification

|                 |                                        |
|-----------------|----------------------------------------|
| Min Bend Radius | Operation: 38.5mm (4* Outer Diameter ) |
| Standard Length | 0.5m,1m,2m,3m,5m,7.5m,10m,15m,20m,30m  |
| Mating Cycle    | Minimum 350                            |

### Technical Drawings

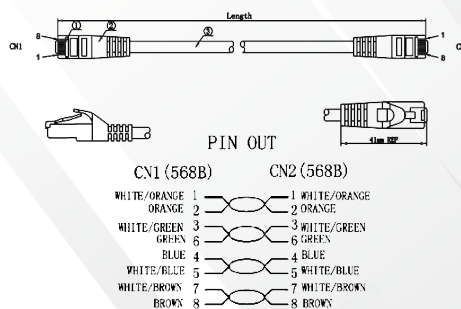

#### CATEGORY 5E U/UTP PATCH CORDS, 24 AWG, LSZH

| Part No.             | Description                                                          |
|----------------------|----------------------------------------------------------------------|
| PC-U5E-H0424-IG-0.5M | Category 5E U/UTP Patch Cord, LSZH Sheath, 0.5 m, International Grey |

\* More colours are available.