

## PC-U6AF-H0426-BU-001M

### Description

Osilan's Cat6A Patch Cords are part of cat6A cable solutions that are flexible and cost-effective solutions that fully comply with category 6A/ Class EA standards. Cat6A Patch cords are available in U/UTP, U/FTP and F/FTP shielded cable and with PVC or LSZH sheath, which are ideal for most of today's LAN network requirements and specifications with designs that support 500 MHz applications.



### Features

- Category 6A U/FTP patch cord.
- LSZH Sheath.
- Wired to T568B wiring schemes.
- 4 Pairs, 26 AWG solid copper conductors.
- Supports IEEE 802.3af, 802.3at, IEEE 802.3bt type 3 and 4.
- Each patch cord is 100% performance tested to component limits.

### Application

- Suitable for all category 6A backbone and horizontal Cabling applications.
- 10 Base-T (Ethernet), 100 Base-T (Fast Ethernet), 1000 Base-T (Gigabit Ethernet) and 10G Base-T (10Gigabit Ethernet).
- 155Mb/s ATM, 622Mb/s ATM, 1.2Gb/s ATM, Token Ring 4/16 & ISDN.
- IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt type 3 and 4.

### Standards

- ANSI/TIA-568-C.2 Category 6A
- IEC 60603-7
- UL444
- ISO 11801 2<sup>nd</sup> Edition
- EN 50173-1
- UL1581
- IEC 619352
- EN 60332-1
- UL1666


#### Technical Specifications

|                            |  |
|----------------------------|--|
| Central Element            | Cross Section - Solid Polyethylene PE  |
| Conductor                  | 26AWG Stranded Bare Copper   |
| Insulation                 | HDPE   |
| Pairs                      | 4 Twisted Pairs  |
| Sheath                     | LSZH (LSZH IEC 60332-1 Sheath)   |
| Outer Diameter             | 5.8mm (+/- 0.3mm)  |
| Identification             | Pair 1: White Blue / Blue<br>Pair 2: White Orange / Orange<br>Pair 3: White Green / Green<br>Pair 4: White Brown / Brown |
| Connector                  | RJ45 8P8C including boot   |
| Wiring Standards           | T568B wiring   |
| Temperature (Installation) | -30°C to +50°C   |
| Temperature (Operation)    | -20°C to +75°  |

#### Mechanical and Electrical Specification

|                 |  |
|-----------------|--|
| Min Bend Radius | Operation: 23.2mm (4* Outer Diameter )         |
| Standard Length | 0.5m, 1m, 2m, 3m, 5m, 7.5m, 10m, 15m, 20m, 30m |
| Mating Cycle    | Minimum 750                                    |

### Technical Drawings

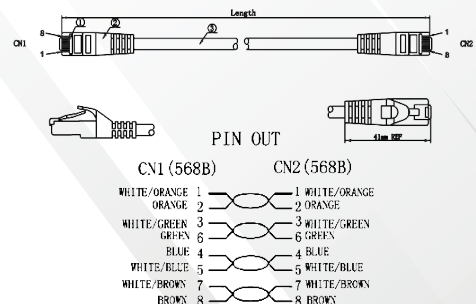

#### CATEGORY 6A U/FTP PATCH CORDS, 26 AWG, LSZH

| Part No.              | Description  |
|-----------------------|--|
| PC-U6AF-H0426-BU-001M | Category 6A U/FTP Patch Cord, LSZH Sheath, 1 m, Blue |

\* More colours are available.