

PPM-S6-24P-1U-BL

Description

Osilan's Modular Patch Panels comply with the current standards and suit application requirements. All ports are numerically identified with an additional writable surface for ease of port naming. Each panel has integrated rear cable management to make the installation easier. Each panel is supplied with cable ties, panel mounting accessories and short-form installation instructions.



Features

- Modular Panels accept Osilan Keystone UTP or STP jack modules.
- Available in 24 & 48 port capacities with 1 & 2 Rack Units designs.
- Pre-printed numbers above each port for easy identification.
- Easy snap in and out for easy moves, adds, and changes.
- Mounting on all standard 19" Racks.


Standards

- ISO IEC11801
- EN 50173-1
- ANSI/EIA/TIA 568C

Technical Specifications

| | |
|-------------------------|--|
| Relative Humidity | Max. non-condensing 93% |
| Material | High Impact, Flame retardant plastic / Cold-Rolled Steel (CRS) |
| Temperature (Operation) | -10°C to +60°C |
| Temperature (Storage) | -40°C to +70° |

Technical Drawings

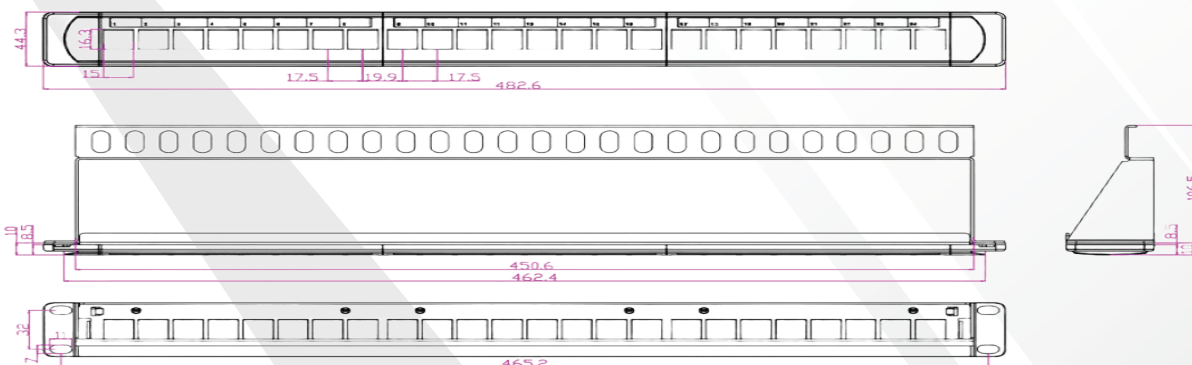

CATEGORY 6 MODULAR PATCH PANEL

| Part No. | Description |
|------------------|--|
| PPM-S6-24P-1U-BL | Category 6, 24 Port Moular Patch Panel Empty, 1U Size, 19" Accepts Screened 24 Jack Modules, Black |