

IDXFTB-002OM2H

Description

Osilan's Indoor Duplex Flat Tight Buffer fibre Cable, an all-dielectric non-metallic design with a low smoke zero halogen (LSZH) Single Jacket, are the optimal choice for any backbone inside the building environment. The Indoor Distribution Single Unit design is perfect for intrabuilding installations and ideal for cabling between telecommunication rooms to individual outlets throughout the building's conduits, ducts and floors, The 900 µm Tight buffered fibre is perfect for a quick breakout with easy termination. The cable structure offers water-blocking and added rodent protection.

Features


- Single Jacket, All-Dielectric, Gel-Free Cable.
- Halogen-free, flame-retardant LSZH jacket.
- Aramid Yarn offers strength and Basic rodent protection.
- 900µm primary coated fibres. Colour-coded according to TIA-598-C.

Application

- Suitable for internal and intrabuilding use
- Suitable for indoor installations in conduit
- Suitable for LAN campus, building and Data Centre backbone infrastructure.

Standards

- ISO 11801 2nd Edition
- TIA 568 C.3
- EN 50173
- EN 50575: Euroclass Eca
- EN 60332-1
- IEC 61034-2
- IEC 60794-2
- ANSI/ICEA S-83-596
- CSA FT4
- CSA FT6

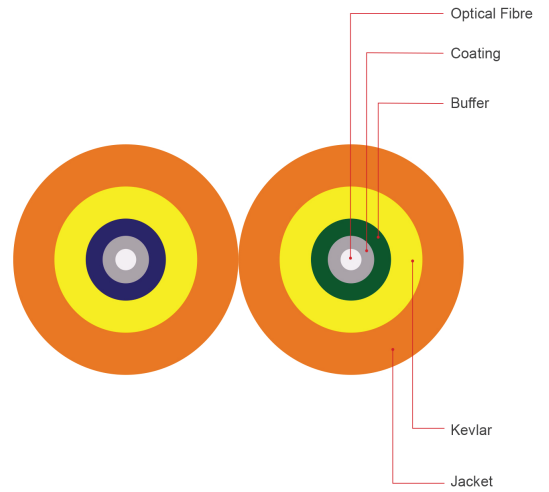

MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

FIBRE COUNT	CABLE DIMENSION (MM)	CABLE WEIGHT (KG/KM)	TENSILE (N)		CRUSH (N/100MM)		MIN BEND RADIUS (MM)		RANGE OF TEMP (C)
			LONG TERM	SHORT TERM	LONG TERM	SHORT TERM	DYNAMIC	STATIC	
2	1.6*3.3	4.4	60	120	200	1000	50D	30D	-20+60
2	1.8*3.7	6.0	60	120	200	1000	50D		
2	2.0*3.7	7.2	90	150	200	1000	50D		
2	2.4*4.9	70.0	90	150	200	1000	50D		
2	2.8*5.7	13.0	160	300	200	1000	60D		
2	3.0*6.1	14.8	160	300	200	1000	60D		

Cable Parameters

Items	Specifications
Loose Tube	1.95mm±0.05mm
Loose Tube Material	PBT
Outer Jacket Material	LSZH
Outer Jacket Colour	UV Black
Temperature range	-20°C to +60°C
Operating Temperature	-40°C to +70°C
Storage Temperature	-40°C to +70°C

Fibre Parameters

Items	Specifications
Cladding Diameter	124.8±0.7 µm
Cladding Non-Circularity	≤0.7%
Core-Cladding Concentricity Error	≤0.5 µm
Coating Diameter	245±5 µm
Coating Non-Circularity	≤6.0%
Cladding-Coating Concentricity Error	≤12.0 µm
ITU-T Standards	G.652.D for SM G.651.1 for MM
Attenuation	1310nm ≤0.36 dB/km
	1550nm ≤0.25 dB/km
	850 nm ≤3 dB/km
	1300nm ≤1 dB/km

ORDERING INFORMATION

Part No.	Description
IDXFTB-002OM2H	Indoor Duplex Flat Tight Buffered Cable, 2 fibre, OM2, low smoke zero halogen (LSZH), Eca-Rated